

SSB SBL 66-12HR (12V 1550W)



Specification	
Nominal Voltage	12V
Nominal Power (Watt / 20°C / 10.0 V/Battery)	5 min 1943,8 W / 12V-Battery
	10 min 1549,6 W / 12V-Battery
	15 min 1251,1 W / 12V-Battery
Nominal Power (Watt / 20°C / 1.67 V/C)	5 min 323,96 W / 1.67 V/C
	10 min 258,26 W / 1.67 V/C
	15 min 208.5 W / 1.67 V/C
Nominal Capacity (10hr / 20°C / 10.0 V/Battery)	54,9 Ah
Internal Resistance	Fully Charged battery 68°F(20°C) ≤5.7 mOhms
Self-Discharge	3% of capacity declined per month at 20°C (average)
	SSB series batteries may be stored for up to 6 months at 68°F(20°C) and then a freshening charge is required. For higher temperatures the time interval will be shorter.
Dimension	Length (mm / inch) 229 / 0.02
	Width (mm / inch) 138 / 5.43
	Height (mm / inch) 211 / 8.31
	Total Height (mm / inch) 216 / 8.50
Approx. Weight (Kg / lbs)	18.0 / 39.7
Operating Temperature Range (temporarily – see our manual)	Discharge : -20~60°C
	Charge : -0~50°C
	Storage : -20~60°C
Max. Discharge Current 68°F(20°C)	550A(5s)
Short Circuit Current	1350A
Charge Methods: Constant Voltage Charge 68°F(20°C)	Cycle use 2.30-2.35VPC
	Maximum charging current 16.5 A
	Temperature compensation -3mV/°C
	Standby use 2.23-2.275VPC
	Temperature compensation -4mV/°C
Life expectancy	10~12 years at 20°C with charge voltage 2.25V/cell

*All specifications are approximate values

Applications

- ◆ Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99% and freedom from electrolyte maintenance or water adding.
- ◆ Not restricted for air transport-complies with IATA/ICAO Special Provision A67.
- ◆ UL-recognized component.
- ◆ Can be mounted in any orientation.
- ◆ Computer designed lead, calcium tin alloy grid for high power density.
- ◆ Long service life, float or cyclic applications.
- ◆ Maintenance-free operation.
- ◆ Low self discharge.
- ◆ Case and cover available in both standard and flame retardant ABS.



Conform to:
IEC60896-21&22 and/or IEC61427


Discharge Constant Current (Amperes at 68°F20°C)

F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	194,43	166,49	149,75	118,96	95,56	70,04	40,27	29,82	19,379	14,230	11,558	9,757	6,519	5,544	2,844
10.0V	179,91	156,18	140,51	112,76	89,14	66,77	38,38	28,39	19,096	14,041	11,415	9,645	6,454	5,492	2,821
10.2V	172,43	150,69	135,42	109,29	85,74	64,88	37,27	27,54	18,719	13,789	11,223	9,494	6,366	5,422	2,791
10.5V	162,86	143,15	127,17	104,16	83,39	63,05	36,66	26,92	18,219	13,455	10,970	9,295	6,249	5,328	2,750
10.8V	153,18	135,62	118,85	98,95	80,92	61,12	35,94	26,27	17,564	13,015	10,635	9,031	6,095	5,204	2,696
11.1V	142,95	127,52	110,19	93,31	78,10	58,86	35,08	25,48	16,710	12,440	10,197	8,685	5,891	5,041	2,625

Discharge Constant Current (Watts at 68°F20°C)


F.V/Time	5min	8min	10min	15min	20min	30min	60min	90min	2h	3h	4h	5h	8h	10h	20h
9.60V	2080,5	1807,6	1635,7	1307,1	1053,8	774,2	446,8	332,2	223,68	165,52	135,13	114,54	77,54	66,37	34,10
10.0V	1943,8	1712,1	1549,6	1251,1	992,6	745,2	430,0	319,4	222,02	164,32	134,16	113,80	77,00	65,88	33,89
10.2V	1885,2	1671,7	1511,3	1226,8	966,0	732,6	422,6	313,4	218,30	161,78	132,21	112,26	76,05	65,08	33,55
10.5V	1802,9	1608,4	1437,0	1184,1	951,4	721,0	420,9	310,3	213,47	158,53	129,72	110,28	74,80	64,04	33,11
10.8V	1720,1	1545,6	1362,7	1141,1	936,6	709,0	418,5	307,1	206,82	153,95	126,21	107,53	73,12	62,62	32,50
11.1V	1637,8	1482,9	1288,8	1098,1	922,4	696,7	416,8	304,0	197,84	147,81	121,46	103,76	70,83	60,75	31,68

Dimensions

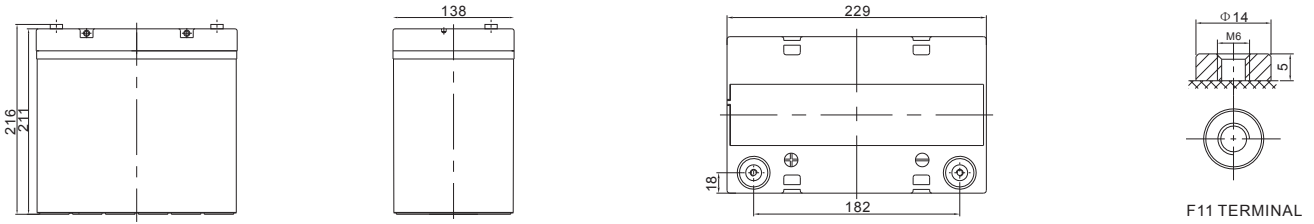


F11 TERMINAL


Discharge Characteristics

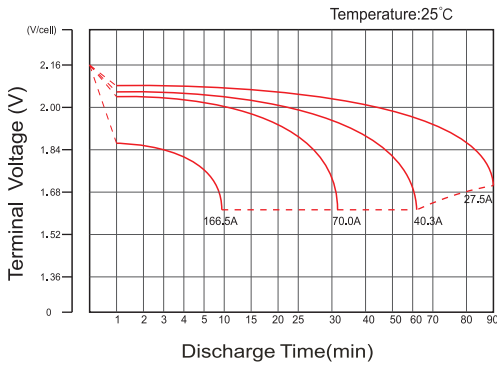


Float Charging Characteristics

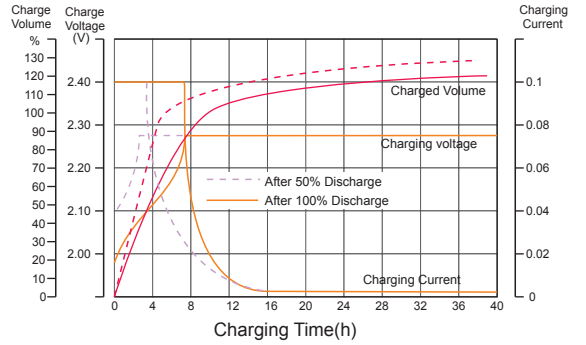


Temperature Effects in Relation to Battery Capacity

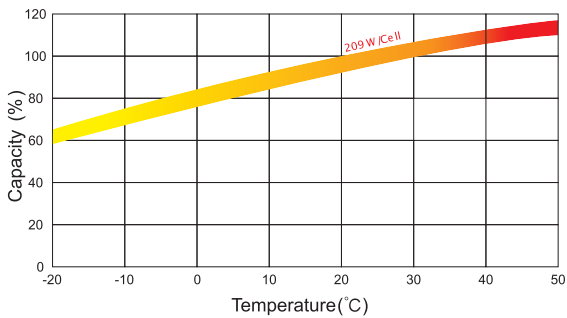

Effect of Temperature on Long Term Float Life

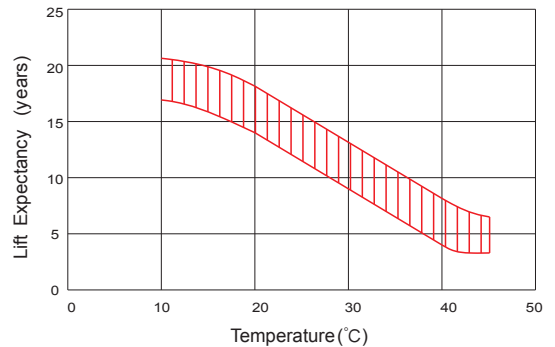

Cycle Life in Relation to Depth of Discharge

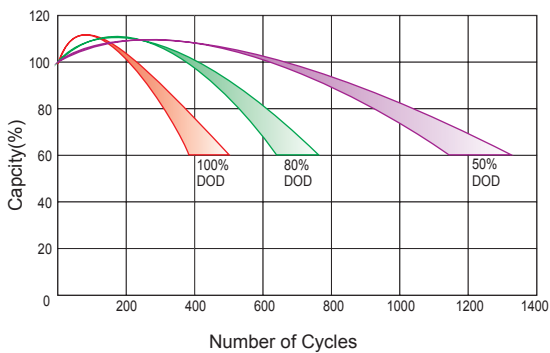

Self Discharge Characteristics

